

## $\mu$ -ROC

### OEM Femtosecond Autocorrelator

ROC stands for Row Optical Correlator. Based on an ultra compact and robust inline setup, the  $\mu$ -ROC takes the ROC concepts to its limit for the measurement of **real-time single-shot autocorrelation traces in the smallest housing footprint ever**. Based on the most advanced innovation from Femto Easy, leveraging several years of experience in the single-shot ultrafast instrumentation, the  $\mu$ -ROC is specifically designed for OEM direct integration into laser heads or laser systems.

#### $\mu$ -ROC



## Key features

- Ultra compact and easy to align
- Robust design, no moving parts. Non sensitive to vibrations
- Directly powered by the USB cable, no power supply required
- Suitable for any repetition rate. Single-pulse extraction possible up to 100 kHz laser repetition rate (with Trigger option)
- User-friendly and powerful software. REST API for standard software integration using simple HTTP requests

## Options

- Trigger
- Enhanced detection

## Specifications


<b>μ-ROC Models</b>	<b>Ti:Sa</b>	<b>Ti:Sa-S</b>	<b>Yb</b>	<b>Yb-S</b>	<b>Er</b>	<b>Tm</b>
Pulse duration range (fs)	min	35 - 75 <sup>1</sup>	10 - 50 <sup>1</sup>	50 - 150 <sup>1</sup>	20 - 50 <sup>1</sup>	50 - 150 <sup>1</sup>
	max	1200	500	1500	1000	1500
Accessible spectral range (nm)	780 - 820	760 - 850	1020 - 1080	960 - 1100	1400 - 1700	1700 - 2100
Input pulse repetition rate			any			
Single-pulse measurement			up to 100 kHz laser repetition rate (with Trigger option, 50 kHz without)			
Min input average power <sup>2</sup>	20 mW	30 mW	5 mW		10 mW	
Min input pulse energy <sup>2</sup>	1 nJ	3 nJ	1 nJ		3 nJ	
Min input pulse energy (single-shot) <sup>2</sup>	25 μJ	25 μJ	1 μJ		3 μJ	
Input polarization			linear horizontal or vertical			
Detection			CMOS 12 bits			
PC Interface			USB 3.1			
Beam height (mm)			20			
Dimensions (mm)			30 x 40 x 45			

<sup>1</sup> The two minimum pulse duration values correspond to the Fourier limited pulse duration with and without GDD precompensation.

<sup>2</sup> Values give an order of magnitude, exact sensitivity depends on parameters such as pulse duration, repetition rate, beam diameter, wavelength...



**STAR Software**

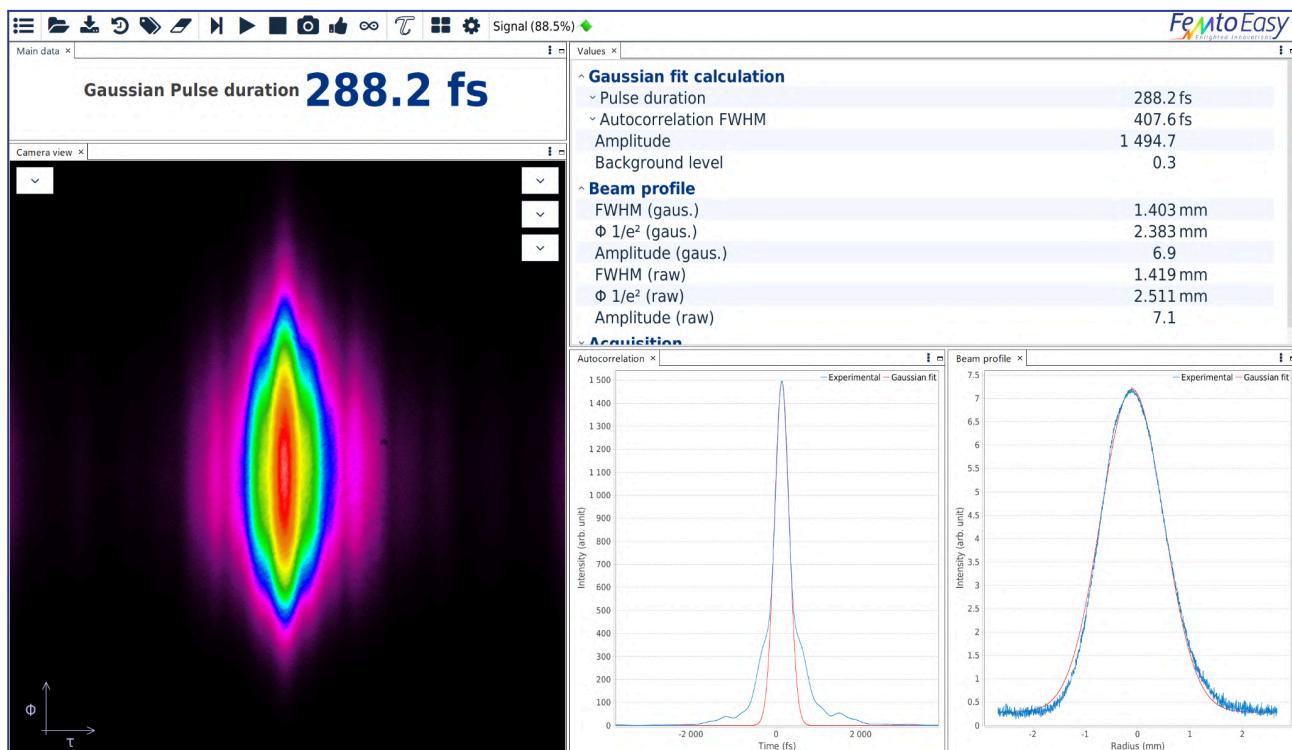

- ◆ Live extraction of shot to shot pulse duration
- ◆ Different calculation methods available for proper pulse estimation (Raw data FWHM, Gaussian fit, sech<sup>2</sup>...)
- ◆ Enhanced background & hot pixels treatment, for optimum dynamic and signal to noise ratio
- ◆ Client / Server interface, allowing remote control through network and REST API for the easiest software integration
- ◆ All data exportable into most common formats